

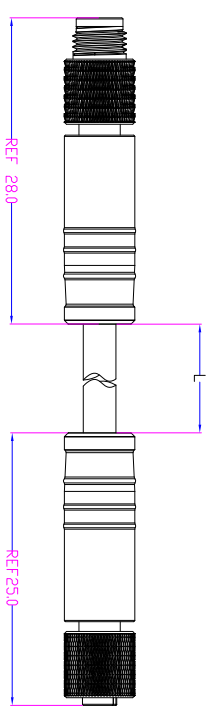


MOLD NO. RFQ NO. : XXXXXX

<http://connectors-cable.com>

REV.	DESCRIPTION	APPD.	DATE
A	INITIAL RELEASED	WANG	05/29/19'



Electrical Character  
 Rating voltage: 30V AC/DC  
 Insulation resistance: >100MΩ  
 Rating current: 1.5A  
 Contact resistance: ≤5mΩ

LENGTH

Part number	L
5L004-300	300±20mm
5L004-1000	1000±30mm
5L004-2000	2000±40mm
5L004-3000	3000±40mm
5L004-5000	5000±50mm
5L004-10000	10000±100mm

General Information  
 Standard: IEC 61076-2-104  
 Connector Body: TPU  
 Contacts: Brass with gold plated  
 Connector Locking System: Screw-locking  
 Waterproof Rating: IP67/IP68

Electrical Performance:  
 1.100%TESTED FOR OPENS SHORTS  
 2.INSULATION RESISTANCE: 5M ohm  
 3.CONNECTING RESISTANCE: 5 ohm  
 4.HI-POT:DC 300V 10ms

Electrical Performance:  
 1.100%TESTED FOR OPENS SHORTS  
 2.INSULATION RESISTANCE: 5M ohm  
 3.CONNECTING RESISTANCE: 5 ohm  
 4.HI-POT:DC 300V 10ms

Pin Out

J1	COLOR	J2
1	RED	1
2	BLACK	2
3	GREEN	3
4	WHITE	4

<http://www.jh-com.com>

CUS P/N:  
 TITLE:  
 Shenzhen JH-C Precision Technology CO

UNDECLARED TOLERANCE  
 X. ±1.0 X. ° ±2.0°  
 .X ±0.5 .X° ±1.0°  
 .XX ±0.2 .XX° ±0.5°

ITEM	PART NAME	DESCRIPTION	QTY
(D)	PVC	PUR 90A BALCK	10g
(C)	CONNECTOR	M5 /F 4pin (防呆)	IPCS
(B)	CONNECTOR	M5 /M 4pin (防呆)	IPCS
(A)	CABLE	U2464 26AWG+4C PVC 300V 105° Jacket OD:3.8 L=A/N	A/N

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-C AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-C.

APPD. :  
 DIR. :  
 HWJ\_05/29/19'

SCALE 1:1 SHEET 1/1 REV. A

骏慧兴业科技有限公司

M5 公头4PIN 连接线

