









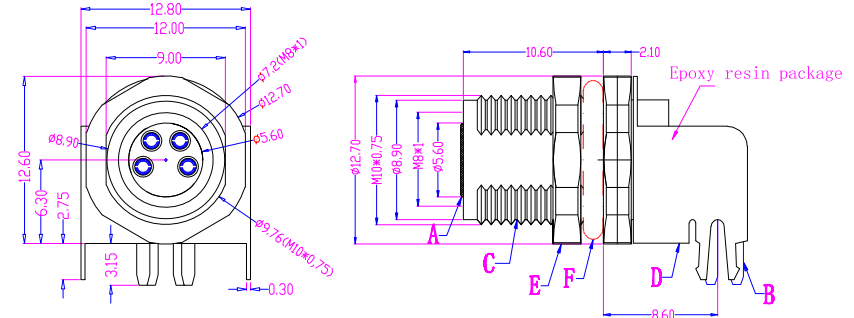



MOLD NO.		RFQ NO.: XXXXXX			REV.	DESCRIPTION	APPD.	DATE
					A	INITIAL RELEASED	WANG	04/24/19'
Serial pin number	3pin	4pin	5pin	6pin	8pin			
End face alignment pin								
Contact pin Diameter	1.00mm	1.00mm	1.00mm	0.75mm	0.60mm			
Diameter of plug plate	1.00mm	1.00mm	1.00mm	0.60mm	0.60mm			
PCB hole position								
VOLTAGE/RATED CURRENT	60V/4A	60V/4A	60V/4A	60V/2A	30V/1.5A			


- A: Nylonpa66 + GF black
- B: Phosphor copper 3 ~ 8pin
- C: Nickel plating on brass H59
- D: Nickel plating on brass H65 of shielding case
- E: Nickel plating on nut brass H59
- F: Waterproof ring silicone

- A: 朔胶 尼龙 PA66+GF 黑色
- B: 磷铜镀金 3~8pin
- C: 黄铜H59 镀镍
- D: 屏蔽壳黄铜 H65 镀镍
- E: 螺母 黄铜H59 镀镍
- F: 防水圈 硅胶













Electrical Character:
 Rating voltage: AC/DC
 Insulation resistance: >100MΩ
 Rating current: According to parameter tableContact
 resistance: ≤5mΩ
 General Information:
 Standard: IEC 61076-2-104
 Connector Body: PA66+GF
 Contacts: Phosphorus copper with Gold plating
 Connector Locking System: Screw-locking
 Waterproof Rating: IP67/IP68

<http://www.jh-com.com> <http://connectors-cable.com>


UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司		
X. ±1.0	X. ° ±2.0°		Shenzhen JH-C Precision Technology CO		
.X±0.5	.X° ±1.0°	PART NO.:	TITLE: M8 connector 90 Degree female series pin 3-8pin		
.XX±0.2	.XX° ±0.5°	92082-01			
UNITS: MM		APPD.:	DWG NO.:B00069		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD.:		SCALE	SHEET
		DR.:	1:1	1/1	REV.
		HWJ_03/11/18'			A

ITEM	PART NAME	DESCRIPTION	QTY					
------	-----------	-------------	-----	--	--	--	--	--

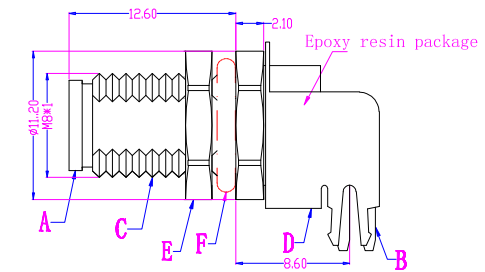

MOLD NO.		RFQ NO. : XXXXXX			REV.	DESCRIPTION	APPD.	DATE
					A	INITIAL RELEASED	WANG	04/24/19'
Serial pin number	3pin	4pin	5pin	6pin	8pin			
End face alignment pin								
Contact pin Diameter	1.00mm	1.00mm	1.00mm	0.75mm	0.60mm			
Diameter of plug plate	1.00mm	1.00mm	1.00mm	0.60mm	0.60mm			
PCB hole position								
VOLTAGE/RATED CURRENT	60V/4A	60V/4A	60V/4A	60V/2A	30V/1.5A			

- A: Nylonpa66 + GF black
- B: Phosphor Brass 3 ~ 8pin
- C: Nickel plating on brass H59
- D: Nickel plating on brass H65 of shielding case
- E: Nickel plating on nut brass H59
- F: Waterproof ring silicone

- A: 朔胶 尼龙 PA66+GF 黑色
- B: 黄铜镀金 3~8pin
- C: 黄铜H59 镀镍
- D: 屏蔽壳黄铜 H65 镀镍
- E: 螺母 黄铜H59 镀镍
- F: 防水圈 硅胶




Opening size of equipment panel



Electrical Character:
 Rating voltage: AC/DC
 Insulation resistance: >100MΩ
 Rating current: According to parameter tableContact
 resistance: ≤5mΩ
 General Information:
 Standard: IEC 61076-2-104
 Connector Body: PA66+GF
 Contacts: Phosphorus Brass with Gold plating
 Connector Locking System: Screw-locking
 Waterproof Rating: IP67/IP68

<http://www.jh-com.com> <http://connectors-cable.com>

UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司		
X. ±1.0	X. ° ±2.0°		Shenzhen JH-C Precision Technology CO		
.X±0.5	.X° ±1.0°	PART NO.:	TITLE: M8 connector 90 Degree male series pin 3-8pin		
.XX±0.2	.XX° ±0.5°	92083-01			
UNITS: MM		APPD.:	DWG NO.:B00070		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED,COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD.:			
		DR.:	HWJ_03/11/18'		SCALE SHEET REV.
				1:1	1/1 A

ITEM	PART NAME	DESCRIPTION	QTY					
------	-----------	-------------	-----	--	--	--	--	--