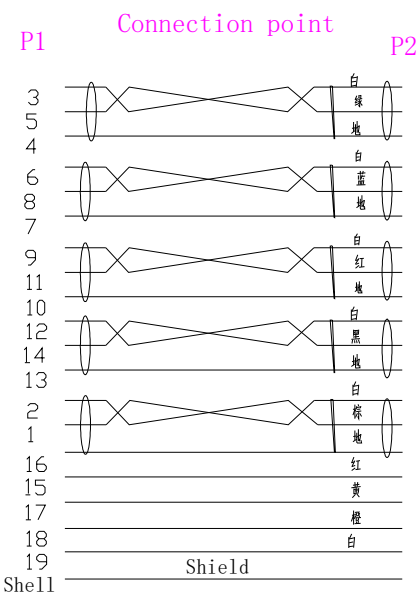




1. The product needs 100% short circuit test;
2. On impedance: 5 ohm (max);
3. Insulation impedance: DC 300V 10m ohm (min);
4. The appearance of the product shall be free of contamination, shrinkage, glue flushing, deformation, variegation, hardware scratch and other defects;
5. Environmental protection standards: products shall meet ROHS requirements;

REV

用量

QTY

MOLD NO.

RFQ NO.: XXXXXX

REV.

DESCRIPTION

APPD.


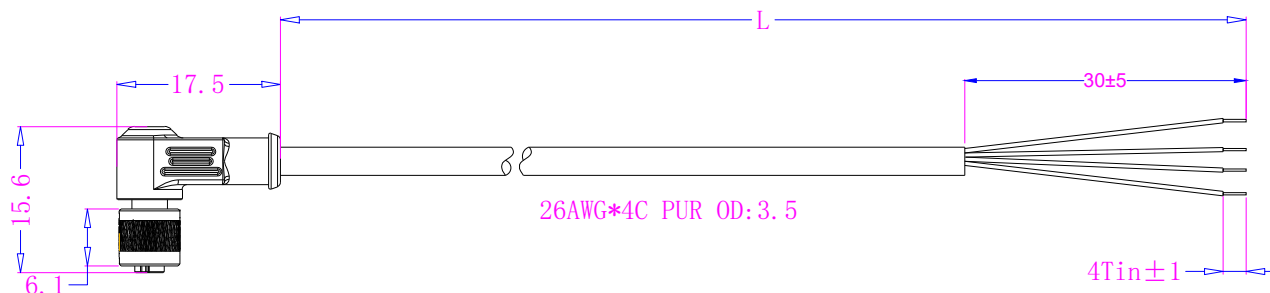

DATE

A

INITIAL RELEASED

WANG

04/24/19'

<http://www.jh-com.com>

LENGTH

Part number	L
61088-01	500±25
61088-02	1000±30mm
61088-03	1500±25
61088-04	3000±40mm
61088-05	5000±50mm
61088-06	10000±100mm

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

P1	Colour	P2
1	Brown	OPEN
2	WHITE	
3	Blue	
4	Black	

Electrical Character

Rating voltage: 60V AC/DC

Insulation resistance: >100MΩ

Rating current: 1A

Contact resistance: ≤5mΩ

General Information

Standard: IEC

Connector Body: TPU

Contacts: Brass with gold plated

Connector Locking System: Screw-locking

Waterproof Rating: IP67/IP68

<http://www.jh-com.com> <http://connectors-cable.com>

UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO		
X. ±1.0	X. ° ±2.0°	PART NO.: 61088-XX	TITLE: M5/F 90 degree right angle plug cable		
.X±0.5	.X° ±1.0°				
.XX±0.2	.XX° ±0.5°				
UNITS: MM		APPD.:	DWG NO.:		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD.:		SCALE	SHEET
		DR.:		1:1	1/1
		HWJ_03/11/18'	REV. A		

ITEM	PART NAME	DESCRIPTION	QTY
------	-----------	-------------	-----

MOLD NO.

RFQ NO.: XXXXXX

REV.

DESCRIPTION

APPD.

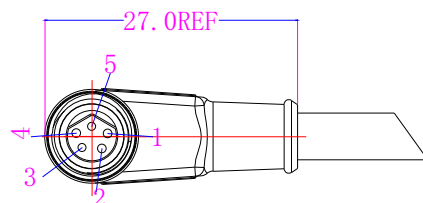
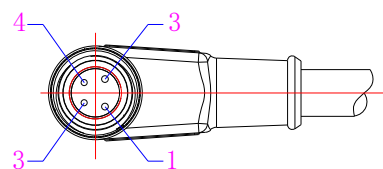
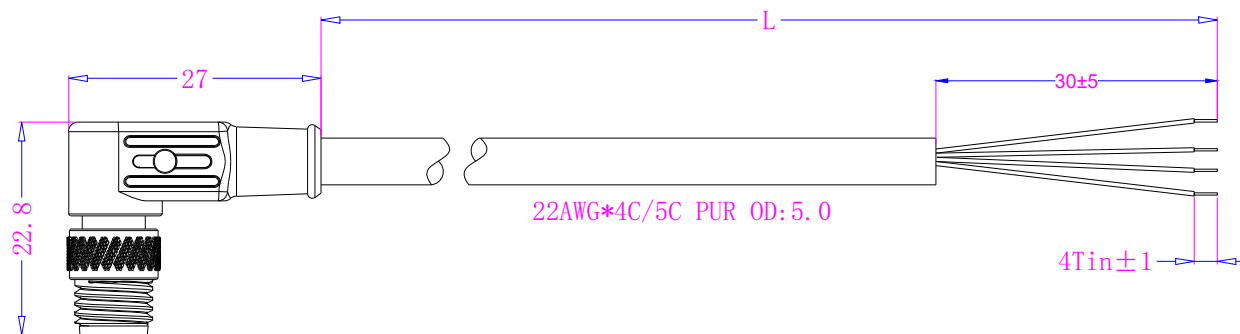
DATE

A

INITIAL RELEASED

WANG

04/24/19'

<http://www.jh-com.com>

LENGTH

Part number	L
61088-01	500±25
61088-02	1000±30mm
61088-03	1500±25
61088-04	3000±40mm
61088-05	5000±50mm
61088-06	10000±100mm

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

Electrical Character

Rating voltage: 60V AC/DC

Insulation resistance: >100MΩ

Rating current: 5A

Contact resistance: ≤5mΩ

General Information

Standard: IEC

Connector Body: TPU

Contacts: Brass with gold plated

Connector Locking System: Screw-locking

Waterproof Rating: IP67/IP68

P1	Colour	P2
1	Brown	OPEN
2	WHITE	
3	Blue	
4	Black	
5	Grey	

<http://www.jh-com.com> <http://connectors-cable.com>

UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO		
X. ±1.0	X. ° ±2.0°	PART NO.: 61188-XX	TITLE: M8/M 90 degree right angle plug cable		
.X±0.5	.X° ±1.0°				
.XX±0.2	.XX° ±0.5°				
UNITS: MM		APPD.:	DWG NO.:		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD.:		SCALE	SHEET
		DR.:		1:1	1/1
		HWJ_03/11/18'		REV.	A

ITEM PART NAME DESCRIPTION

QTY

MOLD NO.

RFQ NO. : XXXXXX

REV.

DESCRIPTION

APPD.

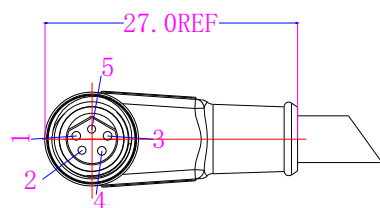
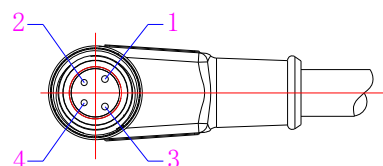
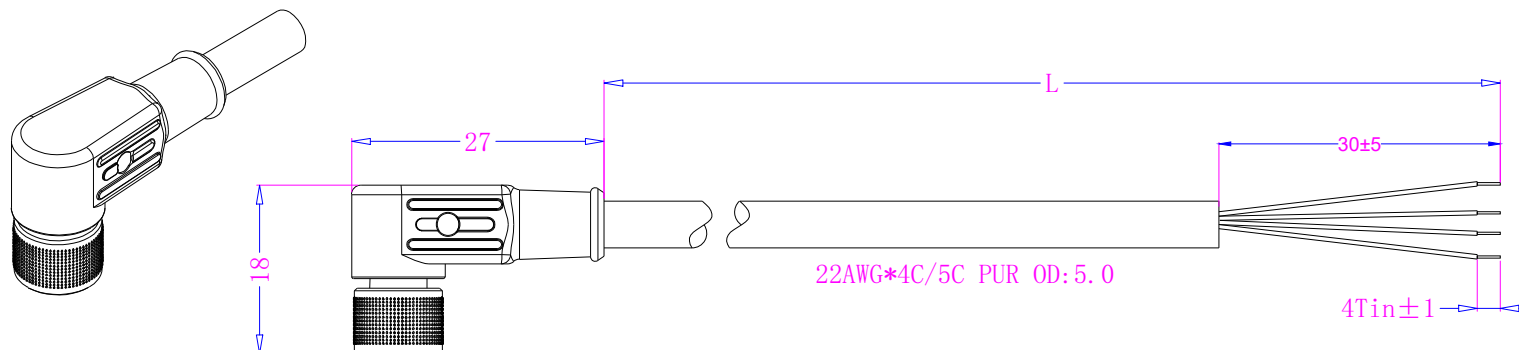
DATE

A

INITIAL RELEASED

WANG

04/24/19'

<http://www.jh-com.com>

LENGTH

Part number	L
61088-01	500±25
61088-02	1000±30mm
61088-03	1500±25
61088-04	3000±40mm
61088-05	5000±50mm
61088-06	10000±100mm

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

Electrical Character

Rating voltage: 60V AC/DC

Insulation resistance: >100MΩ

Rating current: 5A

Contact resistance: ≤5mΩ

General Information

Standard: IEC

Connector Body: TPU

Contacts: Brass with gold plated

Connector Locking System: Screw-locking

Waterproof Rating: IP67/IP68

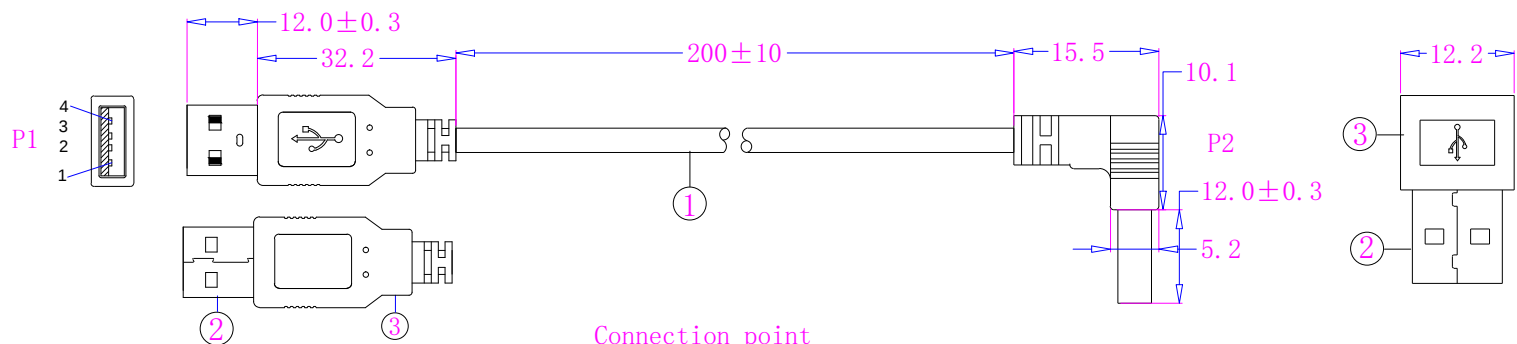
P1	Colour	P2
1	Brown	OPEN
2	WHITE	
3	Blue	
4	Black	
5	Grey	

<http://www.jh-com.com> <http://connectors-cable.com>

UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO		
X. ±1.0	X. ° ±2.0°	PART NO. : 61188-XX	TITLE: M8/F 90 degree right angle plug cable		
. X±0.5	. X° ±1.0°				
. XX±0.2	. XX° ±0.5°				
UNITS: MM		APPD. :	DWG NO. :		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD. :		SCALE	SHEET
		DR. : HWJ_03/11/18'		1:1	1/1
				REV.	A

ITEM PART NAME DESCRIPTION QTY

1	2	3	4	5	6	7	8		
MOLD NO.		RFQ NO. : XXXXXX			REV.	DESCRIPTION		APPD.	DATE
http://www.jh-com.com					A	INITIAL RELEASED		WANG	04/24/19'



技术要求:

1. 产品需100%短断路测试;
2. 导通阻抗:5 ohm (MAX);
3. 绝缘阻抗:DC 300V 10M ohm (MIN);
4. 产品外观无沾污,缩水,冲胶、变形、杂色,五金刮伤等不良;
5. 环保标准: 产品需符合ROHS要求;
6. 裁线: L=590MM, 两端剥外皮12MM, 芯线剥2MM;
7. 包装方式: 单条扎线后25PCS用PE膜扎好;

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
Shell	Shield	Shell

1. The product needs 100% short circuit test;
2. On impedance: 5 ohm (max);
3. Insulation impedance: DC 300V 10m ohm (min);
4. The appearance of the product shall be free of contamination, shrinkage, glue flushing, deformation, variegation, hardware scratch and other defects;
5. Environmental protection standards: products shall meet ROHS requirements;
6. Wire cutting: l = 590mm, 12mm outer skin at both ends and 2mm core wire;
7. Packing method: 25 PCs. after a single binding wire is bound with PE film;

④	Frame	Core wire fixed arrangement inner frame	PCS	1	UNDECLARED TOLERANCE		CUS P/N:		骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO			
③	MOID	45p black environmental protection PVC plug rubber	G	8	X. ±1.0	X. ° ±2.0°						
②	PLUG	HDMI type D 19p pin pin plated gold 1U ' black rubber core shell brass electroplated nickel	SET	1	.X±0.5	.X° ±1.0°	PART NO. :		TITLE: USB 180 degree straight head to right angle cable 610897-XX			
①	CABLE	UL 2725 28Awg * 1p (green / white) + 24awg * 2C (red / Black) + aluminum foil + braid Od: 4.5mm outer cover 65p PVC black wire printing	M	A/N	.XX±0.2	.XX° ±0.5°						
					UNITS: MM		APPD. :		DWG NO. :			
序 号	物料名称	物料规格	单位	用量	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD. :			SCALE	SHEET	REV.
ITEM	PART NAME	DESCRIPTION		QTY			DR. : HWJ_03/11/18'			1:1	1/1	A

MOLD NO.

RFQ NO. : XXXXXX

REV.

DESCRIPTION

APPD.

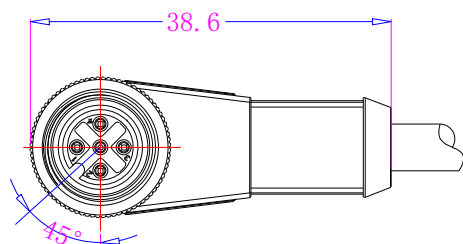
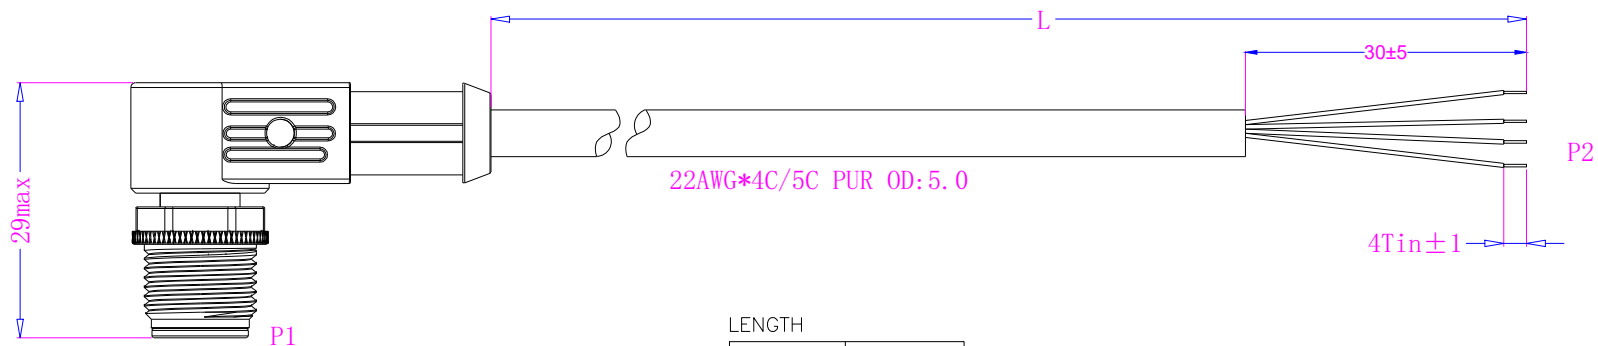
DATE

A

INITIAL RELEASED

WANG

04/24/19'

<http://www.jh-com.com>

LENGTH

Part number	L
61088-01	500±25
61088-02	1000±30mm
61088-03	1500±25
61088-04	3000±40mm
61088-05	5000±50mm
61088-06	10000±100mm

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

Electrical Character

Rating voltage: 60V AC/DC

Insulation resistance: >100MΩ

Rating current: 5A

Contact resistance: ≤5mΩ

General Information

Standard: IEC

Connector Body: TPU

Contacts: Brass with gold plated

Connector Locking System: Screw-locking

Waterproof Rating: IP67

P1	Colour	P2
1	Brown	OPEN
2	WHITE	
3	Blue	
4	Black	
5	Grey	

<http://www.jh-com.com> <http://connectors-cable.com>

UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO		
X. ±1.0	X. ° ±2.0°	PART NO. : 61090-XX	TITLE: M12/M 90 degree right angle plug cable		
. X±0.5	. X° ±1.0°				
. XX±0.2	. XX° ±0.5°				
UNITS: MM		APPD. :	DWG NO. :		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD. :		SCALE	SHEET
		DR. : HWJ_03/11/18'		1:1	1/1
				REV.	A

ITEM PART NAME DESCRIPTION QTY

MOLD NO.

RFQ NO. : XXXXXX

REV.

DESCRIPTION

APPD.

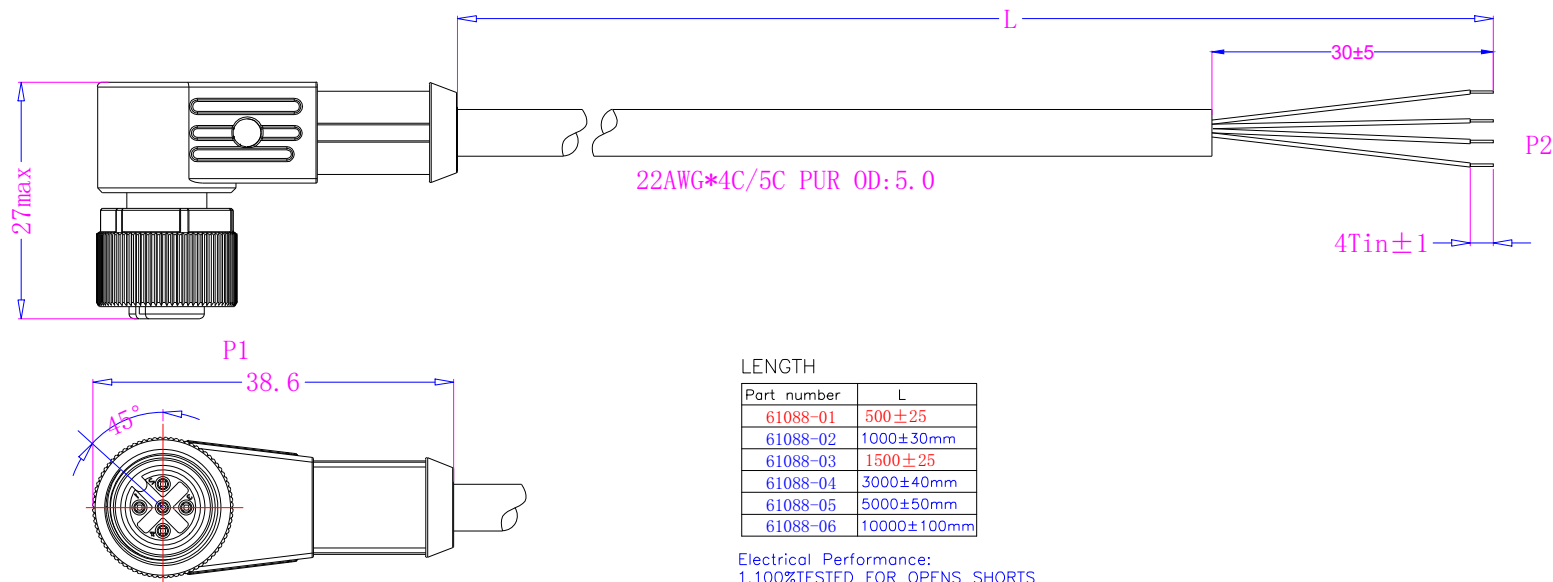
DATE

A

INITIAL RELEASED

WANG

04/24/19'

<http://www.jh-com.com>

LENGTH

Part number	L
61088-01	500±25
61088-02	1000±30mm
61088-03	1500±25
61088-04	3000±40mm
61088-05	5000±50mm
61088-06	10000±100mm

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

Electrical Character

Rating voltage: 60V AC/DC

Insulation resistance: >100MΩ

Rating current: 5A

Contact resistance: ≤5mΩ

General Information

Standard: IEC

Connector Body: TPU

Contacts: Brass with gold plated

Connector Locking System: Screw-locking

Waterproof Rating: IP67

P1	Colour	P2
1	Brown	OPEN
2	WHITE	
3	Blue	
4	Black	
5	Grey	

<http://www.jh-com.com> <http://connectors-cable.com>

UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO		
X. ±1.0	X. ° ±2.0°	PART NO. : 61090-XX	TITLE: M12/F 90 degree right angle plug cable		
. X±0.5	. X° ±1.0°				
. XX±0.2	. XX° ±0.5°				
UNITS: MM		APPD. :	DWG NO. :		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD. :		SCALE	SHEET
		DR. : HWJ_03/11/18'		1:1	1/1
				REV.	A

ITEM

PART NAME

DESCRIPTION

QTY

MOLD NO.

RFQ NO.: XXXXXX

REV.

DESCRIPTION

APPD.


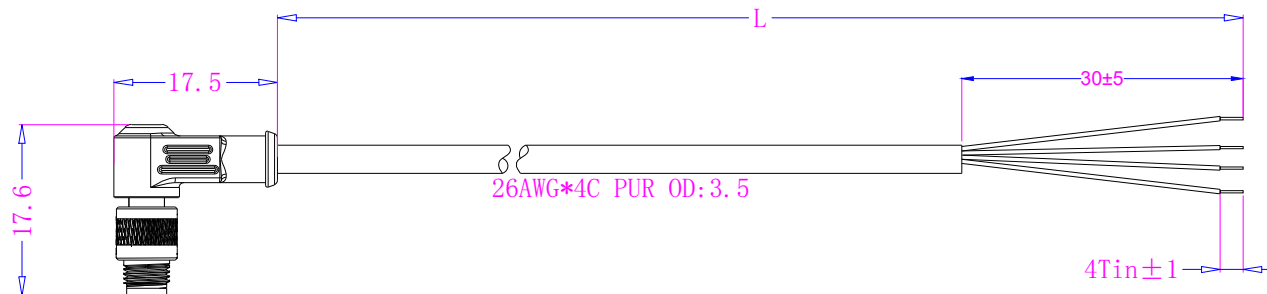

DATE

A

INITIAL RELEASED

WANG

04/24/19'

<http://www.jh-com.com>

LENGTH

Part number	L
61088-01	500±25
61088-02	1000±30mm
61088-03	1500±25
61088-04	3000±40mm
61088-05	5000±50mm
61088-06	10000±100mm

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

Electrical Character

Rating voltage: 60V AC/DC

Insulation resistance: >100MΩ

Rating current: 1A

Contact resistance: ≤5mΩ

General Information

Standard: IEC

Connector Body: TPU

Contacts: Brass with gold plated

Connector Locking System: Screw-locking

Waterproof Rating: IP67/IP68

P1	Colour	P2
1	Brown	OPEN
2	WHITE	
3	Blue	
4	Black	

<http://www.jh-com.com> <http://connectors-cable.com>

UNDECLARED TOLERANCE		CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO		
X. ±1.0	X. ° ±2.0°	PART NO.: 61089-XX	TITLE: M5/M 90 degree right angle plug cable		
.X±0.5	.X° ±1.0°				
.XX±0.2	.XX° ±0.5°				
UNITS: MM		APPD.:	DWG NO.:		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-COM AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-COM.		CHKD.:		SCALE	SHEET
		DR.:		1:1	1/1
		HWJ_03/11/18'	REV. A		

ITEM	PART NAME	DESCRIPTION	QTY
------	-----------	-------------	-----