
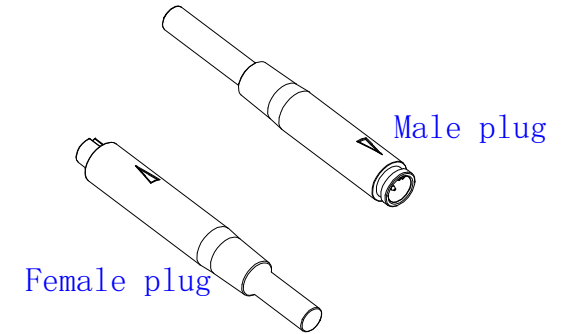


MOLD NO.	RFQ NO. : XXXXXX	REV.	DESCRIPTION	APPD.	DATE
		A	INITIAL RELEASED	WANG	06/09/22'

Click the website to view the official website information  
<http://www.jh-com.com> <http://connectors-cable.com>

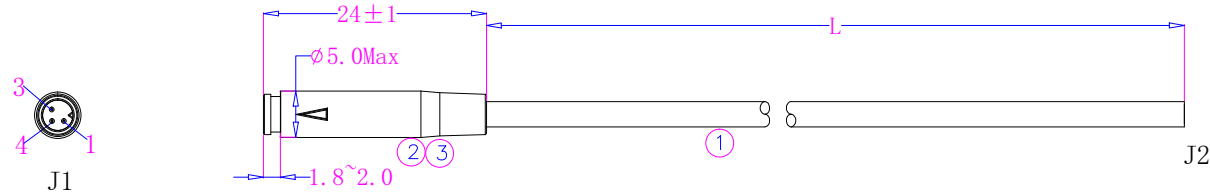

LENGTH

Part number	L
5L012-300	300±20mm
5L012-1000	1000±30mm
5L012-2000	2000±40mm
5L012-3000	3000±40mm
5L012-5000	5000±50mm
5L012-10000	10000±100mm

Electrical Character  
 Rating voltage: 30V AC/DC  
 Insulation resistance: >100MΩ  
 Rating current: 1A  
 Contact resistance: ≤5mΩ

General Information  
 Standard: IEC

Connector Body: TPU+GF  
 Contacts: Brass with gold plated  
 Connector Locking System: Tight fitting quick plug  
 Waterproof Rating: IP67



Electrical Performance:  
 1. 100%TESTED FOR OPENS SHORTS  
 2. INSULATION RESISTANCE: 5M ohm  
 3. CONNECTING RESISTANCE: 5 ohm  
 4. HI-POT:DC 300V 10ms

Pin Out

J1	COLOR	J2
1	BROWN	OPEN
3	BLUE	
4	BLACK	

<http://www.jh-com.com>

ITEM		PART NAME	DESCRIPTION	QTY	UNDECLARED TOLERANCE	CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO			
③		90A black TPU	-25° C~+80° C	10g	.X±0.5 .XX±0.2	.X° ±2.0° .X° ±1.0° .XX° ±0.5°	PART NO. : 61987-XX	TITLE: Non standard fine waterproof connecting wire 3-core male		
②		3pin Male connector		1Set	UNITS: MM		APPD. :	DWG NO. : A0013		
①		26AWG*3C JACKET BLACK TPU CABLE	OD=3.0mm -25° ~80° c	1Pcs	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-C AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-C.		CHKD. :	SCALE	SHEET	REV.
							DR. : HWJ_06/09/22'	1:1	1/1	A

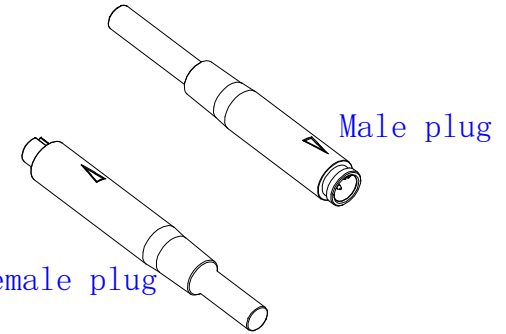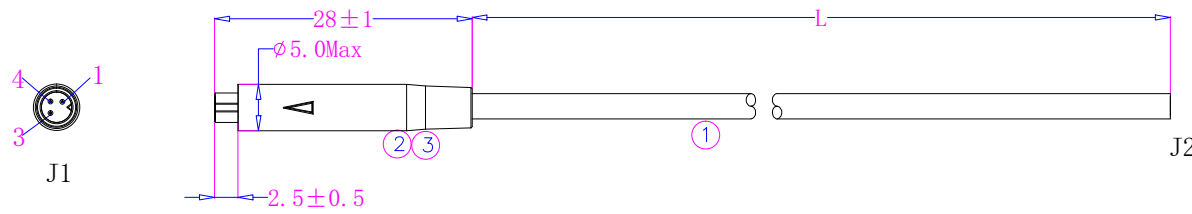

LENGTH

Part number	L
5L012-300	300±20mm
5L012-1000	1000±30mm
5L012-2000	2000±40mm
5L012-3000	3000±40mm
5L012-5000	5000±50mm
5L012-10000	10000±100mm

Electrical Character  
 Rating voltage: 30V AC/DC  
 Insulation resistance: >100MΩ  
 Rating current: 1A  
 Contact resistance: ≤5mΩ  
 General Information  
 Standard: IEC  
 Connector Body: TPU+GF  
 Contacts: Phosphor copper electroplating  
 Connector Locking System: Tight fitting quick plug  
 Waterproof Rating: IP67

Electrical Performance:  
 1. 100%TESTED FOR OPENS SHORTS  
 2. INSULATION RESISTANCE: 5M ohm  
 3. CONNECTING RESISTANCE: 5 ohm  
 4. HI-POT:DC 300V 10ms

Pin Out

J1	COLOR	J2
1	BROWN	OPEN
3	BLUE	
4	BLACK	

<http://www.jh-com.com>

ITEM		PART NAME	DESCRIPTION	QTY	UNDECLARED TOLERANCE	CUS P/N:	骏慧兴业科技有限公司 Shenzhen JH-C Precision Technology CO				
③		90A black TPU	-25° C~+80° C	10g	.X±1.0	X.° ±2.0°	PART NO.: 61988-XX	TITLE: Non standard fine waterproof connecting wire 3-core male			
②		3pin Female connector		1Set	.X±0.5	.X° ±1.0°		APPD.:	DWG NO.: A0013		
①		26AWG*3C JACKET BLACK TPU CABLE	OD=3.0mm -25° ~80° c	1Pcs	.XX±0.2	.XX° ±0.5°		CHKD.:	SCALE SHEET REV.		
							DR.:	HWJ_06/09/22'	1:1	1/1	A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-C AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-C.